

Inspire S 300 Black 950lm 3000K Ra 98 Trailing edge dimming

Article code: 320830
 EAN: 7021983208309



Electrical

System wattage: 15W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
 Luminous flux: 950lm
 Efficacy: 63 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>100,000
 Light distribution: Direct
 Beam angle: 55°
 Visible flicker (PstLM): 0.1
 Stroboscopic flicker (SVM): 0.03

Control/Dimming

Type: Trailing edge dimming
 Driver: 400mA

Protection

Luminaire class: Class I

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Black (RAL 9004)

Mounting/Connection



Mounting: Indoor
 Module: 300
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 300
 Width (mm) W: 59
 Height (mm) H: 85
 Weight (kg) gross/net: 1.089 / 0.988

Packaging

Packing dimensions (mm): 310 x 93 x 69

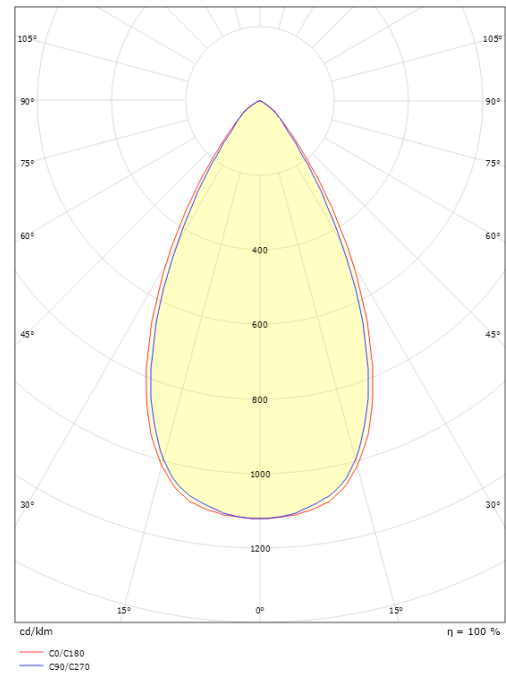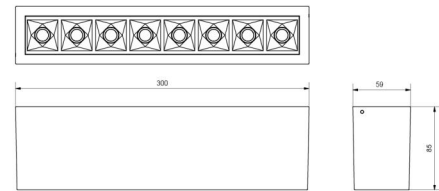

7 0 2 1 9 8 3 2 0 8 3 0 9