

Soft Square Black 890lm 3000K Ra 98 Trailing edge dimming

Article code: 903251
 EAN: 7021989032519



Electrical

Wattage: 12W
 System wattage: 12W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

Light technic

Type of light source: LED (not exchangeable)
 Socket: LED
 Light source included: Yes
 Luminous flux: 890lm
 Efficacy: 74 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 1
 Lifetime: L80/B10 > 100,000
 Light distribution: Direct
 Optic: Reflector
 Beam angle: 60°
 UGR: UGR < 19

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV

Energy and approvals

Energy class (2021-): F
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Black (RAL 9004)

Mounting/Connection




Mounting: Recessed (downlight), Indoor
 Cable entry: Screwless terminal block
 Plug: Screwless terminal block

Dimensions (mm)

Length (mm) L: 95
 Width (mm) W: 95
 Height (mm) H: 58
 Depth (D): 57
 Cut-out (mm): 83
 Ceiling void depth: 57
 Weight (brutto/netto): 0.498 / 0.436

Packaging

Packing dimensions (mm): 170 x 280 x 100

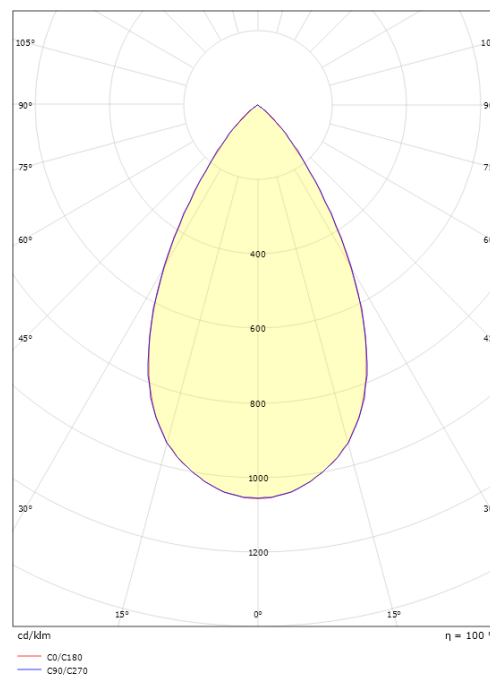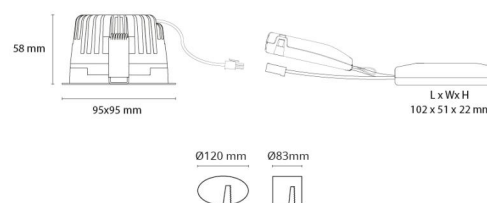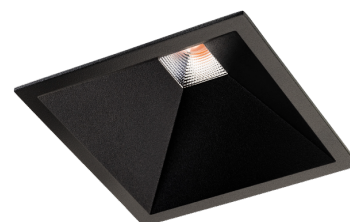

7 0 2 1 9 8 9 0 3 2 5 1 9